

## 405nm, 65mw, TO18 package

### Application :


Industrial use / Biomedical

### Property :

Wavelength Range = 405nm

### Introduction :

Typical emission wavelength at 405nm and it is a efficient radiation source for cw and pulsed operation.

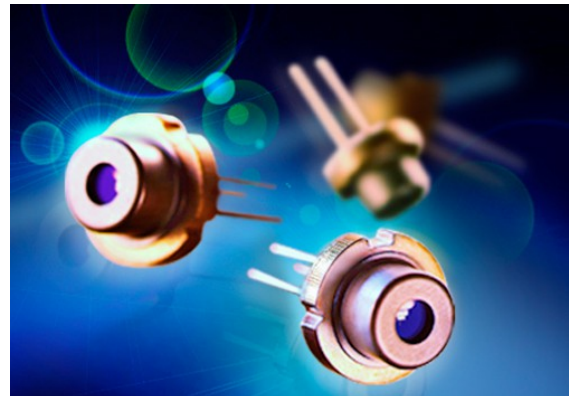


### Laser Characteristics (T=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Emission Wavelength	$\lambda_p$	405	405	410	nm	Po=65mW
Optical Output power	Po	-	-	65	mW	-
Threshold Current	Ith	-	35	50	mA	-
Operating Current	Iop	-	85	115	mA	Po=65mW
Operating Voltage	Vop	-	4.8	5.3	V	Po=65mW
Beam Divergence	$\theta_{//}$	6	8.5	11	deg	Po=65mW
	$\theta_{\perp}$	16	20	24	deg	Po=65mW
Beam Deviation Angle	$\Delta\theta_{//}$	-2	-	2	deg	Po=65mW
	$\Delta\theta_{\perp}$	-2.5	-	2.5	deg	Po=65mW


### Maximum Rating

Parameter	Symbol	Value	Unit
Reverse Voltage	V	2	V
Operating Temperature	To	-20~+75	°C
Storage Temperature	Ts	0~+70	°C


## Package Outlines :

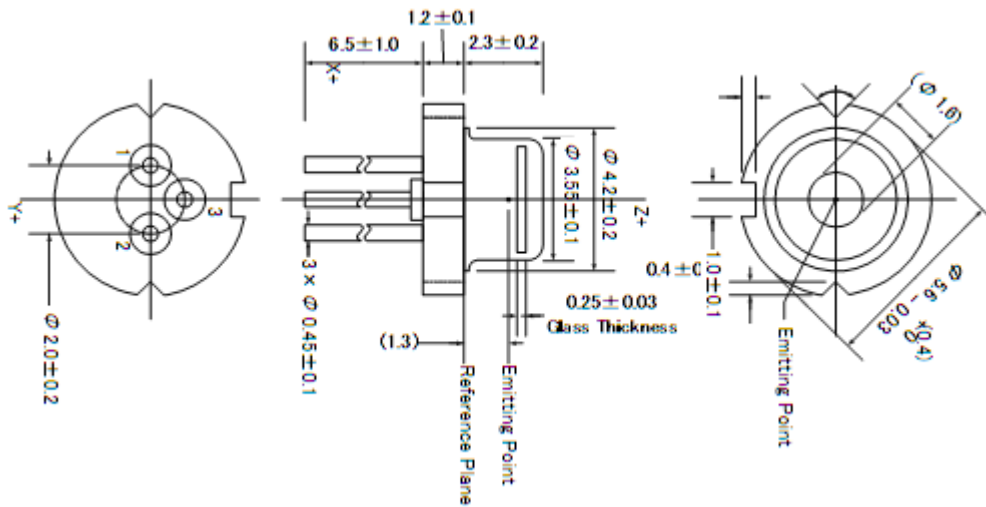

## Package Connection :

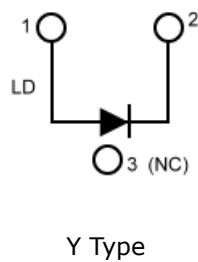

## Optical Output Power vs Forward Current

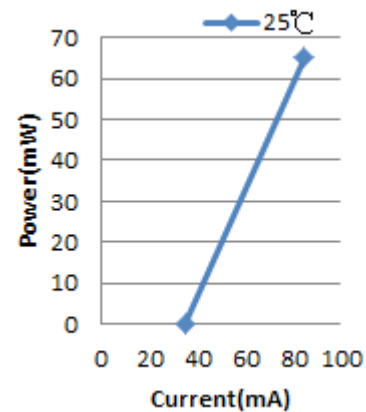

## Caution :

- The forward voltage to drive the optical output power of an LD fluctuates with temperature. High temperature compromises optical efficiency of an LD and thus results in even more operating current to support constant output optical power.
- The reliability of LDs is influenced by Static electricity or electrical surges. Wrist strap or anti-electrostatic glove are recommended to use when picking up LDs.

## Certification :

