

532nm, High Stability, High Quality

Application:

Industrial areas

Property:

Wavelength Range = 532nm

Introduction:

Egismos created high end green DPSS lasers. H8 laser module series is distinguished by its compact size, high MTTF and good stability, meaning that it can be used in many different applications and industries.



Specifications:


Specifications(T=25℃)	Symbol	H835321R-ST01A	H835325R-ST01A
Mode		CW(TTL)	CW(TTL)
Wavelength	λ	532nm	532nm
Spot		Round	Round
Spot Size		10m <Ф15m	10m <Ф15m
Diameter x Length	Фх І	8x30mm	8x30mm
Output Power	Ро	0.5mW~0.9mW, typ 0.7mW	2mW~4,8mW, typ 3.0mW
Power Stability		≤10%	≤10%
Divergence Angle	mrad	0.8	0.8
Operating Voltage(DC)	Vo	2.8V~3.5V, typ 3	2.8V~3.5V, typ 3
CW Operating Current	Io	Typ130, max 280mA	Typ160, max 280mA
Boresight	Deg	< 1 degree	< 1 degree
Operating Temperature	То	10℃~ + 35 ℃	10 ℃~ + 35 ℃
Storage Temperature	Ts	-10 ℃~ + 70 ℃	-10 ℃~ + 70 ℃
Housing Material		Stainless Steel	Stainless Steel
Mean time to failure(MTTF)	hrs	4,000~6,000	4,000~6,000

Ver: 0.1 Date: 2012/10/29 Form no: DLM-000-01

www.egismos.com Tel: +1-360-3893347 sales@egismos.com



Outline Dimensions:

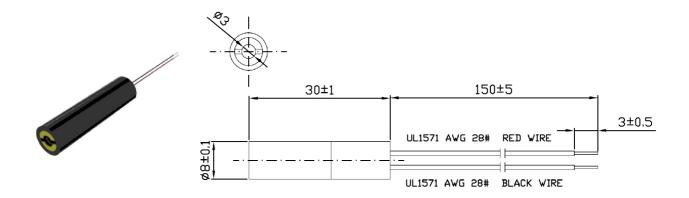

Certification:









Laser Safety

The light emitted form these devices has been set in accordance with IEC60825. However, staring into the beam, whether directly or indirectly, must be avoided.

The maximum permissible exposure(MPE) cannot be exceeded, it includes High-power lasers within an enclosure that prevents exposure to the radiation and that cannot be opened without shutting down the laser. For example, a continuous laser at 600nm can emit up to 0.39mW, but for shorter wavelengths, the maximum emission is lower.

"Caution", visible laser light less than 1.0mW. Considered eye safe, normal exposure to this type of beam will not cause permanent damage to the retina.

Class IIIA

"Danger", visible laser light between 1.0mW and 5.0mW. Considered eye safe with caution. Focusing of this light into the eye could cause some damage.

Class IIIB

"Danger", infrared(IR), and high power visible lasers considered dangerous to the retina if exposed. NB: it is important to note that while complying with the above classifications, unless otherwise stated. Our laser diode products are not certified and are designed solely for use in OEM products. The way in which device is used in the final product may alter it's original design classification, and it is the responsibility of the OEM to ensure compliance with the relevant standards.

Ver: 0.1 Date: 2012/10/29 Form no: DLM-000-01