635nm, High Quality, Standard Model

Application:

Industrial areas / Medical / Biochemical

Property:

Wavelength Range = 635nm (others optional)

Introduction:

Egismos created high stability and quality laser modules that are successfully applied in aerospace, military industry, biochemistry, medical and so on. S8 laser module series is distinguished by it's compact size, high MTTF and value for our clients.

Specifications:

Specifications(T=25℃)	Symbol	S836351D/R S836355D/R	H836351D/R H836355D/R
Mode		CW	CW
Wavelength	λ	635nm	635nm
Spot		Dot/Round	Dot/Round
Spot Size		<8 x 12mm at 10m	<10mm round at 10m min. <8mm at 10m
Diameter x Length	Φx L	8x17mm	8x17mm
Output Power	Po	<1mW,<5mW	0.9mW±10%, 3.2mW±10%, min<5%
Power Stability		<10%	<2%
Divergence Angle	mrad	<1	<0.2, min<0.1
Operating Voltage(DC)	Vo	2.6V~6.0V	2.6V~6.0V
CW Operating Current	Io	25~35mA 50mA max	25~35mA 50mA max
Operating Temperature	To	-10℃ ~ + 50 ℃	-10℃ ~ + 70 ℃ or higher max to +90℃
Storage Temperature	Ts	-40 ℃ ~ + 85 ℃	-40 ℃ ~ + 120 ℃
Housing Material		Brass/Aluminum	Brass/Aluminum
Bore Sight	mm/m	-	<12, min<5
Mean time to failure(MTTF)	hrs	4,000~6,000	6,000~8,000

EGISMOS
www.egismos.com
Tel: +1-360-3893347
sales@egismos.com

Outline Dimensions:

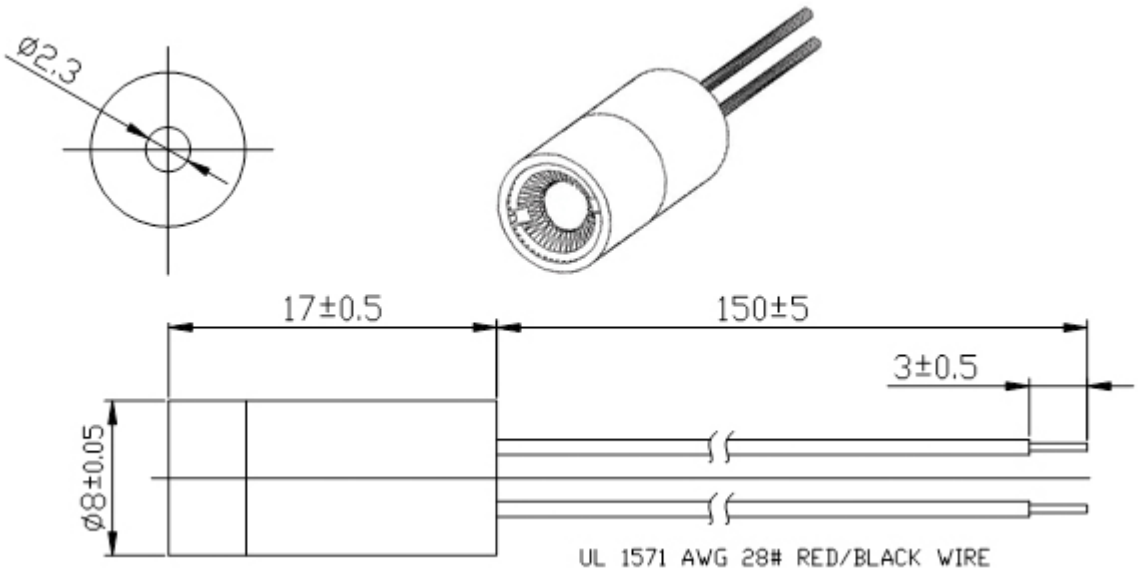

Certification:

RoHS FDA CE TÜV

Laser Safety

The light emitted form these devices has been set in accordance with IEC60825. However, staring into the beam, whether directly or indirectly, must be avoided.

Class I

The maximum permissible exposure(MPE) cannot be exceeded, it includes High-power lasers within an enclosure that prevents exposure to the radiation and that cannot be opened without shutting down the laser. For example, a continuous laser at 600nm can emit up to 0.39mW, but for shorter wavelengths, the maximum emission is lower.

Class II

"Caution", visible laser light less than 1.0mW. Considered eye safe, normal exposure to this type of beam will not cause permanent damage to the retina.

Class IIIA

"Danger", visible laser light between 1.0mW and 5.0mW. Considered eye safe with caution. Focusing of this light into the eye could cause some damage.

Class IIIB

"Danger", infrared(IR), and high power visible lasers considered dangerous to the retina if exposed. NB: it is important to note that while complying with the above classifications, unless otherwise stated. Our laser diode products are not certified and are designed solely for use in OEM products. The way in which device is used in the final product may alter it's original design classification, and it is the responsibility of the OEM to ensure compliance with the relevant standards.

EGISMOS
www.egismos.com
Tel: +1-360-3893347
sales@egismos.com